

# GATEWAY


## INSTALLATION MANUAL



Further information can be found  
in the **Plejd** app or at **[plejd.com](https://plejd.com)**

## 1 Connect the product

Connect Gateway to your local network via Ethernet and to a wall socket using the power adapter. A network cable and a power adapter are supplied in the box. Place Gateway within clear range of your Plejd system, not in a closed metal cabinet. The product can be mounted with the accompanying wall bracket. Screws for the wall bracket are not included.

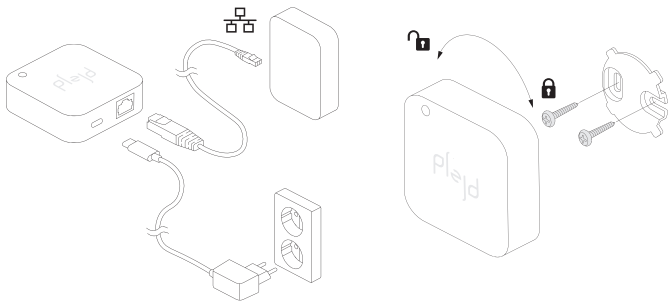

## 2 Follow the instructions in the app

Download the Plejd app on the App Store or Google Play. Open the app and follow the instructions to add Gateway to your Plejd system. Setup requires Bluetooth® and an internet connection.

## **Power adapter (supplied\*)**

100–230 V ~50/60 Hz 0.2 A

Output voltage: +5V DC 1 A

USB-C

\*Supplied with DVE Switching Adapter, model no. DSA-6PFG-05 FEU. Use only adapter listed.

## **Power consumption**

0.6 W

## **External operating temperature**

0 to +35 °C, indoors

## **Dimensions**

70x70x20 mm

## **LAN connection**

Ethernet/RJ45

## **Radio**

2.4 GHz mesh

Bluetooth®

<10 dBm

## **Radio range**

Approx. 10 m indoors

The Plejd mesh technology extends the range by allowing the units to communicate with each other.

## **Pairing with HomeKit®**

You can add Gateway to HomeKit in a few easy steps by using the Apple® Home app directly from your iPhone® or iPad®. Open the Apple Home app and follow the instructions for adding an accessory.

## **Discovery Mode**

To pair with HomeKit, the product needs to be in Discovery Mode. Gateway is automatically in Discovery Mode for 10 minutes after startup. To manually enable Discovery Mode again, press the button on top of Gateway once.

## **Support**

In the event of any technical questions, please contact our customer service:

[support@plejd.com](mailto:support@plejd.com)

+46 (0) 10 203 89 91

## Compliant to standards

Hereby, Plejd AB declares that the radio equipment type GWY-01 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: [plejd.com/compliance](http://plejd.com/compliance)

Plejd AB, Krokslätts Fabriker 27A  
431 37 Mölndal, Sweden



### Important information

Do not use the product if it has visible signs of damage.  
Clean the product with a dry cloth.



### Disposal and recycling

This electrical product should not be disposed of together with other household waste. Contact your local recycling center for guidance on electrical and electronic equipment disposal.

Communication between iPhone®, iPad®, Apple Watch®, HomePod®, or Mac® and the HomeKit® enabled Gateway is secured by HomeKit technology.

Use of the Works with Apple® badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.